


■ Features

- High Luminous LEDs
- 8mm Round Standard Directivity
- UV Resistant Epoxy
- Water Clear Type

■ Applications

- Electronic Signs And Signals
- Small Area Illuminations
- Back Lighting
- Other Lighting

■ Outline Dimension

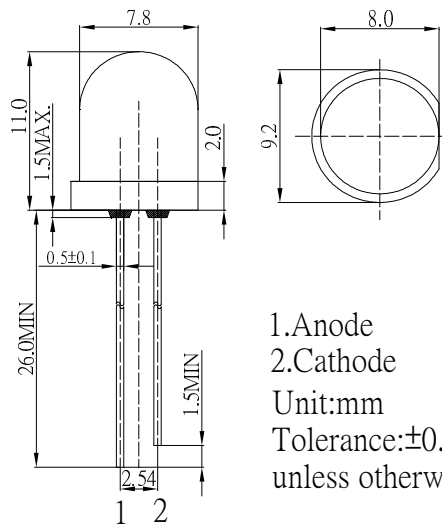


■ Absolute Maximum Rating

($T_a = 25^\circ\text{C}$)

Item	Symbol	Value	Unit
DC Forward Current	I_F	30	mA
Pulse Forward Current*	I_{FP}	100	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	108	mW
Operating Temperature	T_{opr}	$-30 \sim +85$	$^\circ\text{C}$
Storage Temperature	T_{stg}	$-40 \sim +100$	$^\circ\text{C}$
Lead Soldering Temperature	T_{sol}	$260^\circ\text{C}/5\text{sec}$	-

*Pulse width Max. 10ms Duty ratio max 1/10

■ Directivity

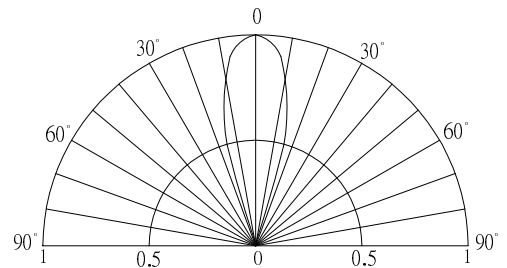

■ Electrical -Optical Characteristics

($T_a = 25^\circ\text{C}$)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	V_F	$I_F = 20\text{mA}$	-	2.9	3.6	V
DC Reverse Current	I_R	$V_R = 5\text{V}$	-	-	10	μA
Luminous Intensity*	I_v	$I_F = 20\text{mA}$	25000	30000	-	mcd
Color Temperature	CCT	$I_F = 20\text{mA}$	-	8000	-	K
Chromaticity Coordinates*	x	$I_F = 20\text{mA}$	-	0.29	-	
	y	$I_F = 20\text{mA}$	-	0.32	-	
50% Power Angle	$2\theta_{1/2}$	$I_F = 20\text{mA}$	-	30	-	deg

*1 Tolerance of measurements of chromaticity coordinates is $\pm 10\%$

*2 Tolerance of measurements of luminous intensity is $\pm 15\%$

*3 Tolerance of measurements of forward voltage is $\pm 0.1\text{V}$